



JUXIN MACHINERY

炬欣机械

天地盖礼盒设备优质供应商
High Quality Supplier For Rigid Box And Gift Box Equipment

拍摄策划 / 顶峰文化 Tel:137 5767 8906



WENZHOU JUXIN MACHINERY CO.,LTD.
温州市炬欣机械有限公司

地址: 浙江省瑞安市鼎业路558号鸿创园2幢502、504室
电话: 0577-6519 3336 邮箱: rajuxin@163.com
传真: 0577-6519 3335 网站: www.zjuxin.cn www.juxin-boxmachine.com

Add: Room 502, 504, Building 2, Hongchuang Park, No. 558 Dingye Road,
Rui'an City, Zhejiang Province
Tel: +0086-577-6519 3336 E-mail: rajuxin@163.com
Fax: +0086-577-6519 3335 www.zjuxin.cn www.juxin-boxmachine.com

■ www.zjjuxin.cn

COMPANY PROFILE

公司简介

温州市炬欣机械有限公司成立于2011年，位于浙江省瑞安市的专业生产礼盒自动化机械设备的企业，主要产品有天地盖成套设备，封面机，开槽机以及文件夹成套设备。产品广泛应用于礼品盒、月饼盒、手机盒、鞋盒、台挂历，文件夹，精装书等的生产和包装。 公司是一家专注于开发、生产、销售以及售后服务于一体的科技型机械设备制造企业。企业以科技为依托，以客户要求为准则，以完备的售后服务为保障，“炬欣”人凭借对先进技术的不断研究应用，使企业得到了长足发展。

自企业创办以来，我们坚持恪守“用户至上，严把质量，注重品牌，追求卓越，讲究信誉,超越自我”的信念，不断完善企业内部和售后服务机制，狠抓企业内部管理，积极参与市场竞争，不断引进吸收高新技术，并致力于新产品的开发和研究，生产了一系列先进的设备，产品畅销国内外三十多个省市自治区和及海外多个国家，深受国内外用户的青睐和好评。

炬欣机械一直专注于包装机械设备的开发与研制，致力为国内外用户提供专业、优质的产品与配套服务。“炬欣”将始终秉承“品质铸造炬欣品牌”的企业理念，做好产品，做强企业，打造一个世界的“炬欣”品牌。

Wenzhou Juxin Machinery Co., Ltd. is a professional manufacturer of rigidbox machine, case machine, lever arch file machine and grooving equipment in Ruian City, Zhejiang Province. It is widely used in the production and packaging of gift boxes, moon cake boxes, mobile phone boxes, shoe boxes, book case, lever arch file and so on.

Juxin Machinery has been focusing on the development and research of packaging machinery and equipment, and is committed to providing professional nd high-quality products and supporting services for domestic and foreign users. Juxin will always adhere to the corporate philosophy of "Quality Casting JuxinBrand", do a good job in products, strengthen the enterprise, and build a world "Jianxin" brand.

引领行业 **10** 多年
并在不断自我超越



AUTOMATIC GLUING AND POSITION MACHINE

全自动视觉定位制盒机
(单抱成型)

JX-CS800A




机器特点

Machine Performance:

- 1. 采用飞达分离式送纸结构，整体动作伺服及气动控制。
- 2. 采用日本欧姆龙PLC智能软件控制系统，自动检测故障，使调试更加方便快捷，减少了原材料的浪费。
- 3. 生产线吸风装置避免粉纸变弯和气泡，尾部配备自动整平装置。
- 4. 采用了智能触摸屏显示和操作，保证了人机对话更方便，直接。



- 1. It adopts high speed automatic paper feeding system, which is controlled pneumatically, and its structures simple and reasonable.
- 2. It adopts PLC control, featuring in simple operation. The troubles are displayed directly on the HMI, which helps the operator easily remove them.
- 3. New designed copper scraper cooperates with the rubber more compactly, effectively avoiding paper winding. And the copper scraper is more durable.
- 4. Paper feeding and positioning system adopt imported high precise photoelectric control device to make the paper and cardboard location more accurate.

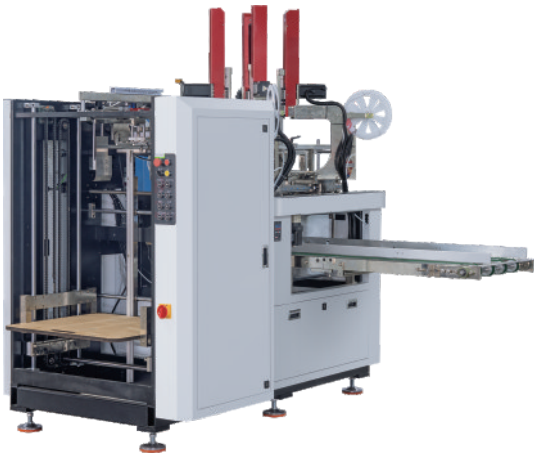

机器主要参数

The Machine Main Parameters:

型号 Model	JX-CS800A
面纸尺寸 Paper size	L140-980mm, W100-760
单定天地盖最大尺寸 Max.size of single fixed ceiling cover	500×500×120mm
面纸折入深度 Folding depth of noodle paper	10-100mm
灰板尺寸 Gray board size	L640-W600
灰板叠放高度 Stacking height of gray boards	900mm
速度 Speed	单定≤26min
设备总功率 Total power of equipment	22KW / AC380V
面纸厚度 Paper thickness	80-200mm
面纸对叠放高度 Face paper stacking height	350mm
单定天地盖最小尺寸 Min.size of single fixed ceiling cover	60×80×12mm
折耳尺寸 Fold ear size	10-60mm
灰板厚度 Thickness of gray board	1-3mm
精确度 Accuracy	±0.1mm
气压 Air pressure	20L/min 0.8Mpa
机械重量 Mechanical weight	5600kg (左右)

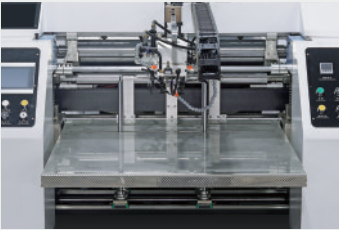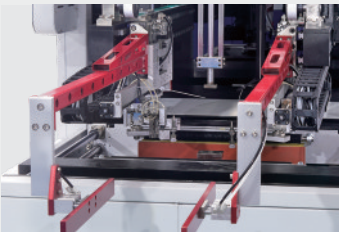

AUTOMATIC GLUING AND POSITION MACHINE

全自动视觉定位制盒机
(双抱成型)

JX-CS620B



机器特点

Machine Performance:

1. 采用飞达分离式送纸结构，整体动作伺服及气动控制。

2. 采用日本欧姆龙PLC智能软件控制系统，自动检测故障，使调试更加方便快捷，减少了原材料的浪费。


3. 生产线吸风装置避免粉纸变弯和气泡，尾部配备自动整平装置。

4. 采用了智能触摸屏显示和操作，保证了人机对话更方便，直接。
1. It adopts high speed automatic paper feeding system, which is controlled pneumatically, and its structures simple and reasonable.

2. It adopts PLC control, featuring in simple operation. The troubles are displayed directly on the HMI, which helps the operator easily remove them.

3. New designed copper scraper cooperates with the rubber more compactly, effectively avoiding paper winding. And the copper scraper is more durable.

4. Paper feeding and positioning system adopt imported high precise photoelectric control device to make the paper and cardboard location more accurate.

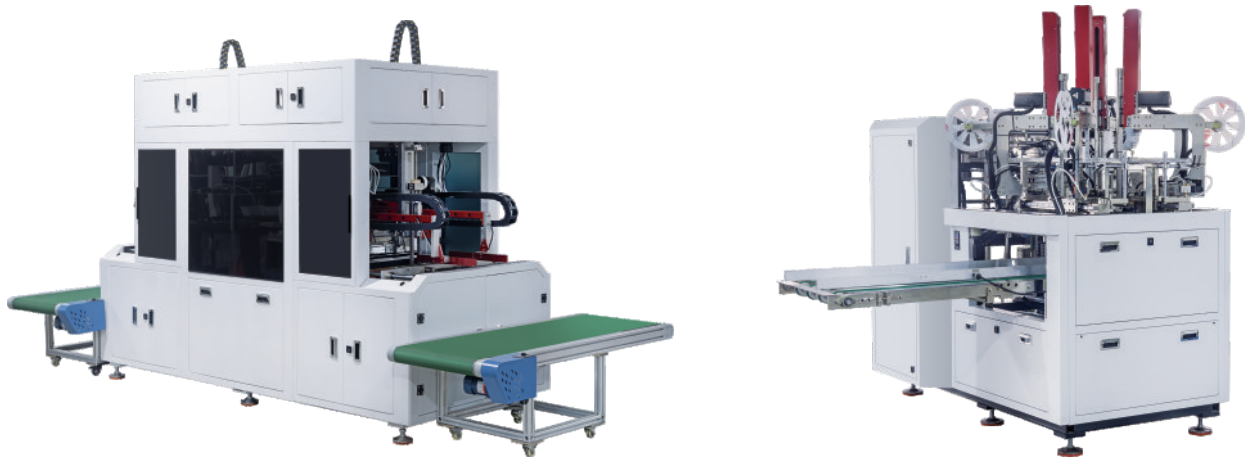

机器主要参数

The Machine Main Parameters:

型号 Model	JX-CS620B
面纸尺寸 Paper size	L140-800mm, W100-600
单定天地盖最大尺寸 Max.size of single fixed ceiling cover	400×400×120mm
面纸折入深度 Folding depth of noodle paper	10-100mm
灰板尺寸 Gray board size	L900-W650
灰板叠放高度 Stacking height of gray boards	900mm
速度 Speed	单定≤26min
设备总功率 Total power of equipment	24KW / AC380V
面纸厚度 Paper thickness	80-200mm
面纸对叠放高度 Face paper stacking height	360mm
单定天地盖最小尺寸 Min.size of single fixed ceiling cover	100×60×15mm
折耳尺寸 Fold ear size	10-60mm
灰板厚度 Thickness of gray board	1-3mm
精确度 Accuracy	±0.1mm
气压 Air pressure	20L/min 0.8Mpa
机械重量 Mechanical weight	6000kg (左右)



AUTOMATIC VISUAL POSITIONING MACHINE

自动视觉定位机

JX-HS700



机器特点




Machine Performance:

对现有流水线上胶机进行智能化升级改造，实现“机器代替人工”。在降低了生产成本的同时，产品合格率也得到了稳定的提升，保证了产品的品质。

- 1.具有高性价比，为客户降低设备采购成本;
- 2.增加生产效率;可实现自动化;
- 3.产品兼容性高;可在现有市场上的通用普通飞达流水线上胶机进行加装;
- 4.节省人工;
- 5.易移植:可移植到其他产线;
- 6.跟踪精度误差±0.2mm，最高生产速度20个/min;
- 7.调试简洁易懂，产品切换方便;

The existing assembly line gluing machine is intelligently upgraded to realize "machine replacinglabor". Decreasing While reducing the production cost, the product qualification rate has alsobeen steadily improved to ensure the product quality.

- 1. With high cost performance, reduce equipment procurement costs for customers.
- 2.increase production efficiency: automation can be realized;
- 3. High product compatibility: it can be added to the general Feidaassembly line gluing machine in the existing market.
- 4.Labor saving.
- 5. Easy to transplant it can be transplanted to other production lines.
- 6. The tracking accuracy error is ± 0.2mm, and the maximum production speed is 20 pieces/min
- 7. The debugging is simple and easy to understand, and the product switching is convenient.




机器主要参数

The Machine Main Parameters:

型号	JX-HS700	型号	JX-HS700
单定天地盖最大尺寸 Max.size of single fixed ceiling cover	600×450mm	单定天地盖最小尺寸 Min.size of single fixed ceiling cover	50×50mm
双定天地盖最大尺寸Max.size of double fixed ceiling cover	420×200mm	双定天地盖最小尺寸 Min.size of double fixed ceiling cover	80×50mm
速度 Speed	单定<26min, 双定22min	精确度 Positioning accuracy	± 0. 1mm
盒子高度 Box height	单定150mm, 双定120mm	面纸重量 Weight of noodle paper	80-200g
设备总功率 Total power of equipment	15KW / AC380V	气压 Air pressure	20L/min 0.8Mpa

工艺流程

Process Flow:

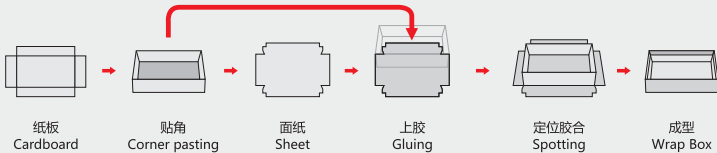

AUTOMATIC VISUAL POSITIONING MACHINE

自动视觉定位机

JX-HK700/HKS700



机器特点

Machine Performance:

对现有流水线上胶机进行智能化升级改造，实现“机器代替人工”。在降低了生产成本的同时，产品合格率也得到了稳定的提升，保证了产品的品质。



- 1.具有高性价比，为客户降低设备采购成本;
- 2.增加生产效率;可实现自动化;
- 3.产品兼容性高;可在现有市场上的通用普通飞达流水线上胶机进行加装;
- 4.节省人工;
- 5.易移植:可移植到其他产线;
- 6.跟踪精度误差±0.2mm，最高生产速度20个/min;
- 7.调试简洁易懂，产品切换方便;

The existing assembly line gluing machine is intelligently upgraded to realize "machine replacinglabor". Decreasing While reducing the production cost, the product qualification rate has alsobeen steadily improved to ensure the product quality.

- 1. With high cost performance, reduce equipment procurement costs for customers.
- 2.increase production efficiency: automation can be realized;
- 3. High product compatibility: it can be added to the general Feidaassembly line gluing machine in the existing market.
- 4.Labor saving.
- 5. Easy to transplant it can be transplanted to other production lines.
- 6. The tracking accuracy error is ± 0,2mm, and the maximum production speed is 20 pieces/min
- 7. The debugging is simple and easy to understand, and the product switching is convenient.

工艺流程

Process Flow:

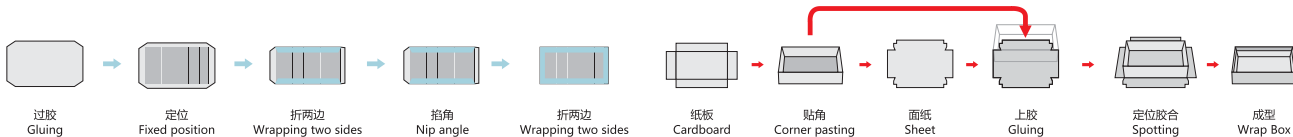

机器主要参数

The Machine Main Parameters:


型号 Model	JX-HK700
纸张长度 Length of paper	30-960mm
中条最小宽度 Min width of spine	≤8mm
面纸厚度 Tissue thickness	0.8-3mm
定位精度 Positioning accuacy	±0.1mm
纸张宽度 Width of paper	20-500mm
纸板厚度 Paperboard thickness	1.0-8.0mm
生产速度 Production Speed	≤26min
整机重量 Overall weight	3400kg
气压 Air pressure	20L/min 0.8Mpa

型号 Model	JX-HKS700
纸张长度 Length of paper	30-960mm
纸张宽度 Width of paper	20-500mm
中条最小宽度 Min width of spine	≤8mm
纸板厚度 Paperboard thickness	1.0-8.0mm
面纸厚度 Tissue thickness	0.8-3mm
气压 Air pressure	20L/min 0.8Mpa
单定天地盖最大尺寸 Maximum size of single fixed ceiling cover	600×450×120mm
单定天地盖最小尺寸 Minimum size of single fixed ceiling cover	50×50×12mm
双定天地盖最大尺寸 Maximum size of double fixed ceiling cover	420×200×120mm
双定天地盖最小尺寸 Minimum size of double fixed ceiling cover	80×50×12mm
速度 Speed	单定≤26min，双定≤22min
整机重量 Overall weight	3400kg

BOX WRAPPING MACHINE

高速自动调模抱盒机

JX-420ZDB/650ZDB ➡




www.zjjuxin.cn

BOX WRAPPING MACHINE

自动盒子包装调模机

JX-500A/600A ➡

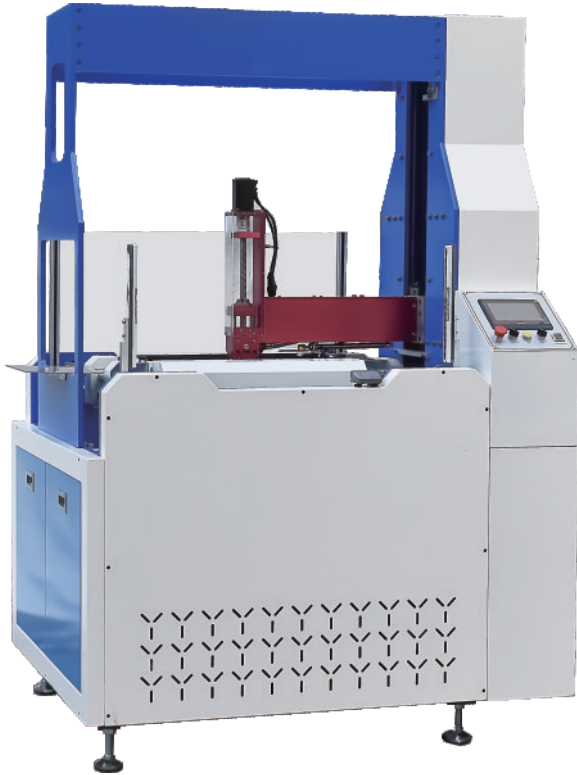

机器特点

Machine Performance:

- 1、本机可实现抱盒成型、折入、压泡一次完成
- 2、高速成型，速度可达 15-25pcs/min
- 3、压泡采用伺服压泡
- 4、折入深度深，可折入 10mm
- 5、节省人工提高效率
- 6、采用独立的人机控制系统，调机时间短，转版快
- 7、定位机可无限延伸做各种不同有产品
- 8、可连线市场所有静上视觉定位线

1. This machine can achieve one-time completion of box forming, folding, and bubble pressing;
2. High speed molding, with a speed of 15-25pcs/min;
3. The foam is compressed using servo pressure;
4. The folding depth is deep and can be folded in by 10mm;
5. Save labor and improve efficiency;
6. Adopting an independent human-machine control system, with short adjustment time and fast version transfer;
7. The positioning machine can be infinitely extended to produce various different products;
8. Can connect all static visual positioning lines in the market.

机器主要参数

The Machine Main Parameters:

型号 Model	JX-420ZDB	JX-650ZDB
最大成品尺寸 Max box size(L×W×H)	500×400×120mm	600×500×120mm
最小成品尺寸 Min box size(L×W×H)	100×70×18mm	100×70×18mm
速度 Speed	15-25 pcs/min	15-20 pcs/min
整机功率 Overall power	4.5kw/三相380V	4.5kw/三相380V
气压 Air supply	0.6Mpa	0.6Mpa
整机重量 Weight	960kg	1100kg
整机尺寸 Dimension(L×W×H)	1260×1700×2000mm	1550×1800×2100mm
木箱尺寸 Weight	长1360*宽1800*高2100	长1650*宽1900*高2200
体积CBM	4.5	4.5
矮款机型配流水线高度 Height of distribution water line for short models	780-870mm	780-870mm
高款机型配流水线高度 Height of distribution water line for high-end models	1050-1100mm	1050-1100mm

机器特点

Machine Performance:

本机是生产礼品箱和刚性盒的理想自动化设备，通过手动定位内盒和面纸，将固定盒放入机木模中，然后自动运行：一次完成盒胶、折叠、成型。每分钟可生产15-20件箱，大大提高了刚性箱的生产效率，节省了生产成本，由于每一个动作都是机械防御，规范产品生产，大大提高了产品质量。

1. 该机器由伺服电机和气动、PLC编程控制完成。
2. 机器调试通过人机界面选择完成，易于调整。

The machine is an ideal automation equipment for producing gift boxes and rigid boxes By manual locating the inner box and the facial paper on the assembly line, the fixed box is placed into the machine wood mold, then automatic running: Box gluing, folding, and forming are completed at one time. 15-20 pieces boxes can be produced per minute, which greatly improves the production efficiency of the rigid box and saves production costs, Because each action is mechanically defensive standardizing the production of the product, greatly improving the quality of the product.

1. The machine is completed by servo motor and pneumatic, PLC programming control.
2. The machine debugging is completed by the man-machine interface selection, which is easy to adjust.

机器主要参数

The Machine Main Parameters:

型号 Model	JX-500A	JX-600A	JX-600S (定制)
最大成品尺寸 Maximum finished product size	500×450×120mm	600×480×150mm	650×550×180mm (200mm)
最小成品尺寸 Minimum finished product size	50×50×8mm	50×50×10mm	50×50×8mm
速度 Speed	15-22pc/min	15-22pc/min	15-22pc/min
整机功率 Overall power	6kw/220V (3kw/380V)	8kw/220V (3kw/380V)	8kw/220V (3kw/380V)
气压 Air supply	≥0.6Mpa	≥0.6Mpa	≥0.6Mpa
整机尺寸 Dimension(L×W×H)	长1550*宽1210*高1950mm	长1600*宽1260*高2100	长1550*宽1210*高2100mm
木箱尺寸 Wooden crate size	长1670*宽1300*高2270mm	长1700*宽1360*高2370	长1670*宽1300*高2370mm
体积CBM Volume CBM	3.8	4.5	4
整机重量 Whole machine weight	980kg 木箱：1260kg	1050kg 木箱：1320kg	1060kg 木箱：1340kg

BOX WRAPPING MACHINE

天地盖成型折入机

JX-430/540/650 ➔

机器特点

Machine Performance:

1. 机器采用伺服气动，PLC控制。
2. 机器通过人机界面调试，简单易选。
3. 机器所有控制部件均采用国际高端品牌，故障少，精度高。
4. 触摸紧急停止开关的机器，例如紧急按自动停止。



- 1.Machine with servo pneumatic, PLC control.
- 2.Machine is debugged by man-machine interface is simple and easy to adjust the selection.
- 3.Machine all control parts adopt international high-end brands, low failure, high precision.
- 4.Machine with touch the emergency stop switch, such as an emergency press automatic stop.

机器用途


Machine Features:

本机JX-430，JX-540是加工精装盒，天地盒的理想自动化设备，通过人工在流水线上将内盒和面纸定好位，再将定好位的纸盒套入机器木模上，机械自动运行；糊盒，折边，压泡一次性守成。每分钟可生产精装盒15~25个，大大提高精装盒的生产效益，节省了生产成本。因每个动作都是机械式守成；使产品标准化生产，大大提高了产品的质量。


Box wrapping machine is the ideal equipment for producing gift boxes and rigid boxes. By manually locating the inner box and the facial paper on the assembly line, the fixed box is placed into the machine wood mold, then automatic running; Box gluing,folding, and forming are completed at one time. 15-25 pieces boxes can be produced per minute, which greatly improves the production efficiency of the rigid box and saves production costs. Because each action is mechanically defensive: standardizing the production of the product, greatly improving the quality of the product.

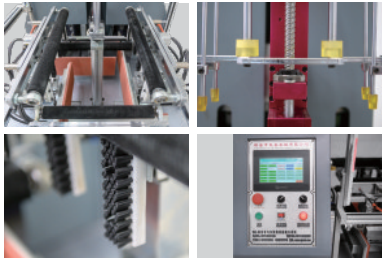

A(模式) 标准天地盖盒



B(模式) 深折天地盖盒



C(模式) 对折耳型天地盖盒

机器主要参数

The Machine Main Parameters:

型号 Model	JX-430	JX-540	JX-650
最大成品尺寸 Max box size(L×W×H)	400×300×110mm	500×400×150mm	650×500×180mm
最小成品尺寸 Min box size(L×W×H)	40×40×8mm	80×60×8mm	80×60×8mm
速度 Speed	15-20 pcs/min	15-20 pcs/min	15-20pcs/min
整机功率 Whole machine power	2.5kw/220V	2.5kw/220V	3.5kw/220V
气压 Air supply	≥0.6Mpa	≥0.6Mpa	≥0.6Mpa
整机尺寸 Dimension(L×W×H)	1000×1300×2150mm	1000×1300×2150mm	1500×1200×2350mm
木箱尺寸 Wooden crate size	1220×1510×2250mm	1220×1510×2250mm	1660×1380×2510mm
整机重量 Weight	800kg	800kg	950kg 木箱1060kg
体积CBM	4.2	4.2	5.9

AUTOMATIC FEEDING RIGID BOX

CORNER PASTING MACHINE

全自动天地盖飞达贴角机(无模)


JX-450TS ➔

机器特点

Machine Performance:

- 1.PLC控制，触摸屏操作界面
- 2.飞达送纸，最高可堆放1000mm的纸板
- 3.纸板快速堆垛转换装置
- 4.更换模具快捷简单，适用于不同规格的产品
- 5.热熔胶带自动输送、切断、贴角、一次性贴四角
- 6.胶带走后自动报警功能




- 1.PLC control, humanized operation interface
- 2.The cardboard conveying feeder automatically, can be stacked up to 1000 mm of the cardboard
3. The cardboard fast stacked conversion device
- 4.Replace the mold fast and simple, suitable for different specifications of products
5. Hot melt tape automatic conveying, cutting, Angle,a one-time box corners of adhesive
- 6.Tape away after the automatic alarm function

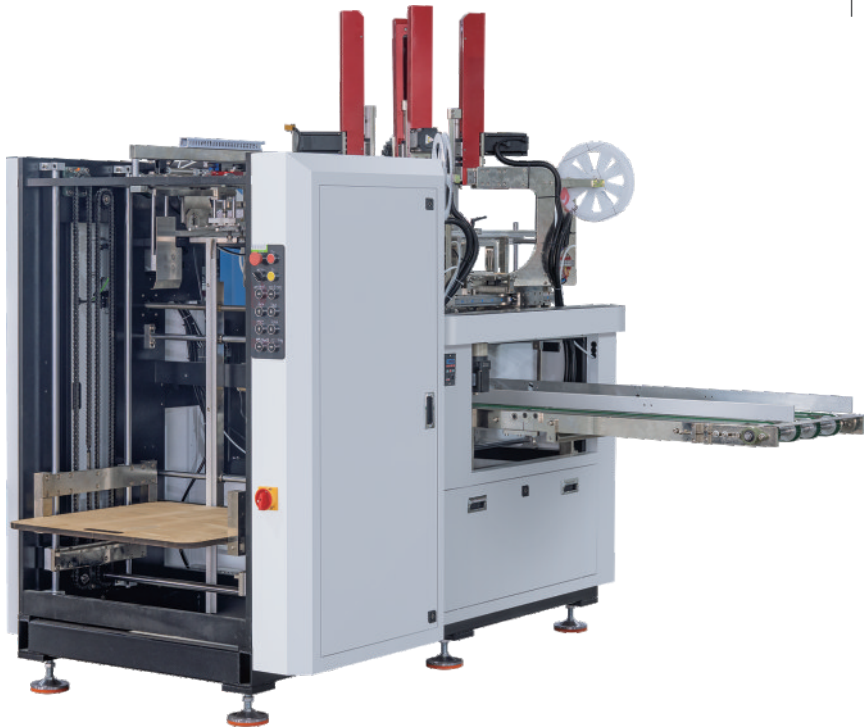

机器主要参数

The Machine Main Parameters:

型号 Model	JX-F450TS
灰板尺寸 Gray board size	L640-W600
灰板叠放高度 Stacking height of gray boards	900mm
灰板厚度 Thickness of gray board	1-3mm
速度 Speed	20-50 pcsmi
整机功率 Whole machine power	3kw/220V
气压 pressure	≥0.6Mpa
整机尺寸 Dimensions (L×W×H)	长2040×1260×1890
木箱尺寸 Wooden crate size (L×W×H)	长2140×1360×1990



Angle pasting 角粘贴

AUTOMATIC FEEDING RIGID BOX CORNER PASTING MACHINE

全自动天地盖飞达贴角机

JX-450TS ➡



www.zjjuxin.cn

机器特点

Machine Performance:

- 1.PLC控制，触摸屏操作界面
- 2.飞达送纸，最高可堆放1000mm的纸板
- 3.纸板快速堆垛转换装置
- 4.更换模具快捷简单，适用于不同规格的产品
- 5.热熔胶带自动输送、切断、贴角、一次性贴四角
- 6.胶带走后自动报警功能


- 1.PLC control, humanized operation interface
- 2.The cardboard conveying feeder automatically, can be stacked up to 1000 mm of the cardboard
3. The cardboard fast stacked conversion device
- 4.Replace the mold fast and simple, suitable for different specifications of products
5. Hot melt tape automatic conveying, cutting, Angle,a one-time box corners of adhesive
- 6.Tape away after the automatic alarm function



机器主要参数

The Machine Main Parameters:


型号 Model	JX-F450TS
纸张最大尺寸 Max. paper size	680×620mm
纸张最小尺寸 Min. Paper Size	90×90mm
纸盒最大尺寸 Max. size of cardboard box	440×380×120mm
纸盒最小尺寸 Min. size of paper box	60×60×15mm
纸盒最深高度 The deepest height of the cardboard box	140mm
速度 Speed	20-50pcsmi
整机功率 Whole machine power	3kw/220V
气压 Pressure	≥0.6Mpa
整机尺寸 Dimensions (L×W×H)	长2040×1260×1890
木箱尺寸 Wooden crate size (L×W×H)	长2140×1360×1990

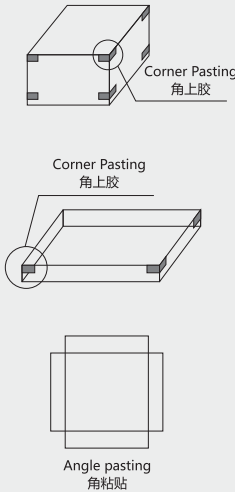

HIGH SPEED AUTOMATIC CORNER PASTING MACHINE

全自动高速贴角机

JX-TJ450 ➡



机器特点

Machine Performance:

1. 采用PLC控制，人性化操作界面
2. 纸板自动输送
3. 纸板快速叠放转换装置
4. 更换模具快捷简单，适合不同规格产品
5. 皮带式灰板快速进料
6. 热熔胶纸带自动输送、分切、贴角、一次性完成纸盒四角粘合
7. 热熔胶纸带走完自动报警功能

1. Man-machine interface with PLC automatic control.
2. Non-stop cardboard quick stacking and conversion device.
3. The replacement of the product is quick and easy, and the mold-exchange is fast.
4. Automatically sending tape, slitting, and sticking, to complete four-corner pasting at one time.
5. Belt type fast feeding board.
6. With automatic alarm stop function when the cardboard has finished feeding.
7. With automatic alarm function when the hot melt adhesive tape run out.



机器主要参数

The Machine Main Parameters:

型号 Model	JX-TJ450
纸张最大尺寸 Maximum paper size	650×550mm
纸张最小尺寸 Minimum Paper Size	90×90mm
纸盒最大尺寸 Maximum size of cardboard box	450×400×120mm
纸盒最小尺寸 Minimum size of paper box	50×50×15mm
速度 Speed	20-50 pcsmi
整机功率 Whole machine power	3KW / 220V
气压 pressure	≥0.6Mpa
整机尺寸 Dimensions	2300×1200×2100mm
木箱尺寸 Wooden crate size	2480×1380×2250mm
体积 CBM	8
整机重量 Whole machine weight	1100Kg

MANUAL CORNER PASTING MACHINE

手动贴角机

JX-40 ➡



AUTOMATIC DOUBLE FEEDER GLUING MACHINE

全自动双飞达上胶机

JX-GS650/
GS850/GS1050



机器特点

Machine Performance:

自动进纸精装涂胶机主要用于不同厚度的涂胶纸张、纸板、特种纸、纸盒、纸箱、瓦楞纸箱、笔记本制作纸板拼图，代替手工涂胶，提高工作效率。涂胶机是进行涂胶的专用设备 and 纸制品，它是广泛应用于印刷包装、纸盒、纸箱、书皮制作和织物等领域样品批量生产行业。

Auto feeder hardcover gluing machine is mainly used for the gluing of different thickness of paper, paperboard, special paper, Paper box, carton box, Corrugated box, note book making, paperboard puzzle, instead of manual gluing, improve the efficiency of work.The gluing machine is the special equipment and paper products to do gluing, which is widely used in printing and packaging, paper box, carton, book cover making and Fabric sample volume producing industry.

机器用途

Machine Features:

1. 自动送纸前缘吸纸，适用于各种纸张尺寸。
2. 可调辊在板材表面涂抹光滑的胶水涂层。
3. 循环胶系统带温控器，确保足够的胶水稠度。
4. 输送机配备空气吸入系统，使板材向前平稳地移动。
5. 进料台采用滚珠轴承设计，板材直接输送通过压力系统。

1. Automatic sheet-feed front edge suction for various sheet sizes.
2. Adjustable rollers apply smooth glue coating on the sheet surface.
3. The circulating glue system with temperature controller assures the adequate glue consistency.
4. Conveyor equipped with air-suction system to forward sheet flat and stably.
5. With ball bearing design of feed table, the sheets are conveyed straight-through by pressure system.



机器主要参数

The Machine Main Parameters:

型号 Model	JX-GS650	JX-GS850	JX-GS1050
纸张厚度 Paper thickness	100-200g	100-200g	100-200g
纸张宽度 Paper width	80-600mm	80-800mm	100-1000mm
纸张长度 Paper length	160-1000mm	160-1000mm	160-1000mm
速度 Speed	0-40mmin	0-40m/min	0-40m/min
整机功率 Power	7.5kw/380V	7.5kw/380V	7.5kw/380V
机械尺寸 Machine dimension	6500×1100×860mm	6500×1300×860mm	6500×1500×860mm
输出大小 Conveyor size	650×4500mm	800×4500mm	1000×4500mm
机器重量 Machine weight	1100kg	1250kg	1450kg

AUTOMATIC COVERING MACHINE

自动皮壳四面包边机

JX-C900/C1200/C1700



机器用途

Machine Features:

自动四边包机用于制作精装书，笔记本封面，台历，挂历，书本型盒子，快劳夹和不规则封面等。定位好发行的纸和纸板，通过重新压制，折边两边，压力角，前后折边，可自动四边折。不仅精度高，速度快，而且折叠角度优美，侧面折叠也完美。本机是批量生产精装封面的首选设备。

Automatic four side covering machine is used to make hardcovers, notebook covers, desk calendars, hanging calendars, book-type boxes, lever arch files and irregular covers, etc. positioned well issue paper and cardboard, through the re-press,fold both sides of edge, pressure angle, fold edges of front and back,it can fold four sides automatically. Not only high precision, high speed, and fold the angles beautiful, fold the sides perfectly. This machine is the preferred equipment mass production of hardcover case.



机器主要参数

The Machine Main Parameters:

型号 Model	JX-C900	JX-C1200	JX-C1700
最大封面尺寸 Paper thickness	450×900mm	600×1200mm	700×1700mm
最小封面尺寸 Paper width	90×150mm	90×180mm	100×180mm
纸张厚度 Paper length	1-3mm	1-3mm	1-3mm
速度 Speed	0-20pc/min	0-20pc/min	0-20pc/min
整机功率 Power	2kw/220W	2kw/220W	2kw/220W
气压 Dimension	≥0.6Mpa	≥0.6Mpa	≥0.6Mpa
整机尺寸 Conveyor size	2480×1140×1380mm	2760×1300×1420mm	3260×1400×1420mm
机器重量 Machine weight	1100Kg	1200Kg	1400Kg

FULLY AUTOMATIC DUPLEX
BUBBLE PRESS MACHINE

全自动双工位压泡机

JX-AP450 ➡



机器主要参数

The Machine Main Parameters:

型号 Model	JX-AP450
最大产品尺寸 Max. product size	450×400×160mm
最小产品尺寸 Min. product size	80×60×10mm
速度 Speed	28-35 pcs/min
整机功率 Machine power	2.5KW/220V
整机尺寸 Dimensions	2300×920×1800mm
整机重量 Weight	750kg

FULLY AUTOMATIC SINGLE STATION
FOAM PRESS MACHINE

全自动单工位压泡机

JX-AP604 ➡



机器主要参数

The Machine Main Parameters:

型号 Model	JX-AP604
最大产品尺寸 Max. product size	600×400×160mm
最小产品尺寸 Min. product size	80×60×10mm
速度 Speed	20-25 pcs/min
整机功率 Machine power	2.5KW/220V
整机尺寸 Dimensions	1700×1300×1800mm
整机重量 Weight	750kg

FULLY AUTOMATIC
SLOTING MACHINE

全自动开槽机

JX-1000/1300 ➡



机器主要参数

The Machine Main Parameters:

型号 Model	JX-1000	JX-1300
自动送纸横宽 Automatic paper feeding width	100-950mm	100-1250mm
自动送纸竖长 Automatic paper feeding vertical length	95-500mm	95-500mm
直线精度公差 Linear accuracy tolerance	±0.1mm	±0.1mm
最高线速度 Max. linear velocity	195 pcs/min	195 pcs/min
开槽角度范围 Slot angle range	90-140°	90-140°
纸板厚度范围 Thickness range of cardboard	0.2mm-4mm	0.2mm-4mm
同时开槽数 Simultaneous number of slots	9	9
整机功率 Machine power	2.2kw	2.2kw
整机尺寸 Dimensions	2100×1600×1500mm	2100×1900×1500mm
整机重量 Weight	1200kg	1300kg

CARDBOARD SLITTING
MACHINE

纸板分切机

QZB-1300 ➡



机器主要参数

The Machine Main Parameters:

型号 Model	QZB-1300
纸板宽度 Cardboard width	50-1260mm
纸板厚度 Caliper	1.5-4mm
额定电压 Rated voltage	380v
额定功率 Rated power	3.7kw
整机重量 Machine weight	800kg
整机尺寸 Dimensions	1900×1100×1400mm

AUTOMATIC MAGNET MACHINE WITH DRILL SYSTEM

全自动铣孔贴磁铁一体机

JX-620 ➡



机器主要参数

The Machine Main Parameters:

纸板尺寸	Cardboard size	Max. 620×500mm Min. 200×100mm
纸板厚度	Cardboard thickness	1-2.5mm
磁铁直径	Magnet diameter	8-20mm
磁铁数量	Magnet Qty	1-2pcs
出胶量	Glue volume	1mg-200mg
磁铁最小间距	Min. Distance of magnet	95mm
磁铁最大间距	Max. Distance of magnet	460mm
速度	Speed	<25pcs/min
气压	Air supply	≥0.6Mpa
功率	Power	6.5KW, 220V/1P, 50Hz
机械尺寸	Machinery dimension	3000×1200×1700mm
机械重量	Machinery weight	1000KG



BOARD DRILLING MACHINE

洗孔机

JX-JK600 ➡

型号 Model	JX-JK600
钻头 Mould	2 set(Φ10、12、14、16mm)
电压 Input	220V、Single Phase 50/60Hz、2KW
速度 Speed	10-20pcs/min
机械尺寸 Dimension	700×650×1100mm
重量 Weight	122kg



SEMI AUTOMATIC MAGNET STICKING MACHINE

半自动磁铁贴片机

JX-CT600/TP600 ➡

型号 Model	JX-CT600	JX-TP600
用途 Use for	Magnet	Iron plate
胶水类型 Glue type	Cold glue	Hot melt glue
纸板宽度 Cardboard width	150-600mm	150-600mm
纸板长度 Cardboard length	150-1000mm	150-1000mm
磁铁距离 Distance of two unit	95-420mm	95-420mm
速度 Speed	15-25pcs/min	15-25pcs/min
机械尺寸 Dimension	1150×1000×1100mm	1150×1000×1100mm
机械重量 Weight	138kg	138kg



PAPER ANGLE CUTTER

切角机

JX-100 ➡

型号 Model	JX-100
切角高度 Max Width of cardboard	100mm
速度 Cutting length	0-90time/min
整机功率 Power	1.1kw
机械尺寸 Dimension	1150×500×1350mm
机械重量 Weight	170kg



TABLE GLUING MACHINE

台式上胶机

JX-JS700/1000/700R/1000R ➡

型号 Model	JX-JS700	JX-JS1000	JX-JS700R	JX-JS1000R
过胶面 Glue sides	Up	Up	Up	Up
过胶宽度 Glue width	700mm	1000mm	700mm	1000mm
纸张厚度 Paper thickness	0-300gsm	0-300gsm	0-300gsm	0-300gsm
胶水类型 Glue type	Cold glue	Cold glue	Cold glue/jelly glue	Cold glue/Jelly glue
整机功率 Power	0.18kw	0.2kw	3kw	3kw
机械尺寸 Dimension	1330×450×500mm	1330×450×500mm	1030×450×500mm	1330×450×500mm
机械重量 Weight	60kg	80kg	60kg	80kg

